


### STAMPED MAILER


- Can be printed on coated or uncoated paper
- Stamped mailers require at least a 1.25" x .75" space in the top right corner for stamp placement
- A 4.75" x .625" clearance in the bottom right hand corner is required for USPS to print a barcode. The barcode can be printed over a light color block, such as tan, but cannot be printed over black or darker colors. This area must also remain clear of copy.
- A 3.5" - 4.75" wide by 2.125" tall area is required just above the barcode on the right side of the mailer for the variable addressing. Width of area varies depending on size of mailer. No other copy can fall into this area or your mailer may not be readable by the machine at USPS and therefore undeliverable. **This area must be kept clear of return addresses as well; otherwise your mailer will be delivered to you instead of your customers!**

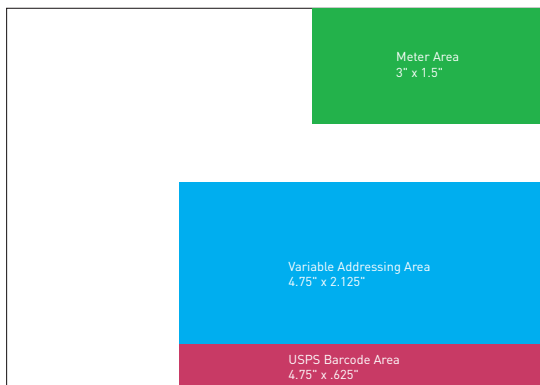

### METERED MAILER

- Can only be printed on uncoated paper
- Metered mailers require at least a 3" x 1.5" space in the top right corner for metering. No copy, images, or dark color blocks may fall into this area.
- A 4.75" x .625" clearance in the bottom right hand corner is required for USPS to print a barcode. The barcode can be printed over a light color block, such as tan, but cannot be printed over black or darker colors. This area must also remain clear of copy.
- A 3.5" - 4.75" wide by 2.125" tall area is required just about the barcode on the right side of the mailer for the variable addressing. Width of area varies depending on size of mailer. No other copy can fall into this area or your mailer may not be readable by the machine at USPS and therefore undeliverable. **This area must be kept clear of return addresses as well; otherwise your mailer will be delivered to you instead of your customers!**



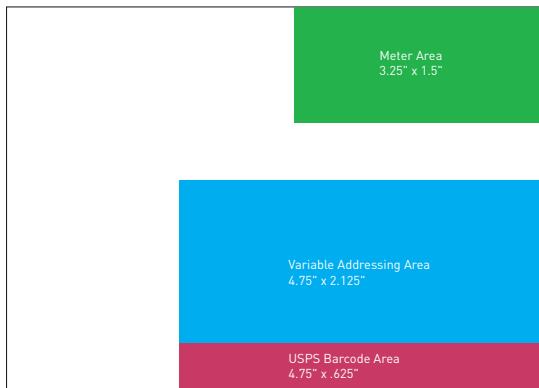

### METER TAPE MAILER

- Not recommended as it is aesthetically unpleasing
- Can be printed on coated or uncoated paper
- Stamped mailers require at least a 3.25" x 1.75" space in the top right corner for stamp placement
- A 4.75" x .625" clearance in the bottom right hand corner is required for USPS to print a barcode. The barcode can be printed over a light color block, such as tan, but cannot be printed over black or darker colors. This area must also remain clear of copy.
- A 3.5" - 4.75" wide by 2.125" tall area is required just above the barcode on the right side of the mailer for the variable addressing. Width of area varies depending on size of mailer. No other copy can fall into this area or your mailer may not be readable by the machine at USPS and therefore undeliverable. **This area must be kept clear of return addresses as well; otherwise your mailer will be delivered to you instead of your customers!**